

▶ **TM-745E/TM-765E** Monochrome Interlaced Scan CCD




- **2/3" high resolution HAD type interline transfer CCD**
- **768 (H) x 493 (V) resolution (EIA)**
- **756 (H) x 581 (V) resolution (CCIR)**
- **Built-in Edge Enhancement**
- **Low light sensitivity (0.5 lux)**
- **Smearless shutter 1/60 to 1/10,000 sec.**
- **Full frame integration and asynchronous reset**
- **External sync, interlace, non-interlace auto select**
- **Excellent S/N ratio (>50 dB)**




Specifications for TM-745E/TM-765E

Specifications	TM-745E	TM-765E
Sensor	2/3" interlaced scan IT CCD, HAD type ICX422AL ICX423AL	
Active pixels	768 (H) x 493 (V)	756 (H) x 581 (V)
Cell size	11 μm x 13 μm	11 μm x 11 μm
Scanning	525 lines 60 Hz 2:1 interlaced	625 lines 50 Hz 2:1 interlaced
Synchronization	Internal sync/external auto switch HD/VD: 4.0 Vp-p, 4.7k Ω VD = interlaced/non-interlaced HD = 15.734KHz $\pm 5\%$ HD = 15.625KHz $\pm 5\%$	
TV resolution	570 x 350 TV lines	560 x 420 TV lines
S/N ratio	>50 dB	
Sensitivity	0.3 lux $f=1.4$ without IR cut filter	
Video output	1.0 Vp-p composite video, 75 Ω	
AGC	ON/OFF (default)	
Gamma	0.45 / 1.0 (default)	
Lens mount	C-mount standard	
Power	12V DC, 350 mA	
Operating temperature	-10° C to 50° C	
Vibration	7 Grms (10 Hz to 2000 Hz) Random	
Shock	70 G, 11 ms, half-sine	
Dimensions (H x W x L)	32 mm x 42 mm x 130 mm	
Weight	200 g	


Dimensions

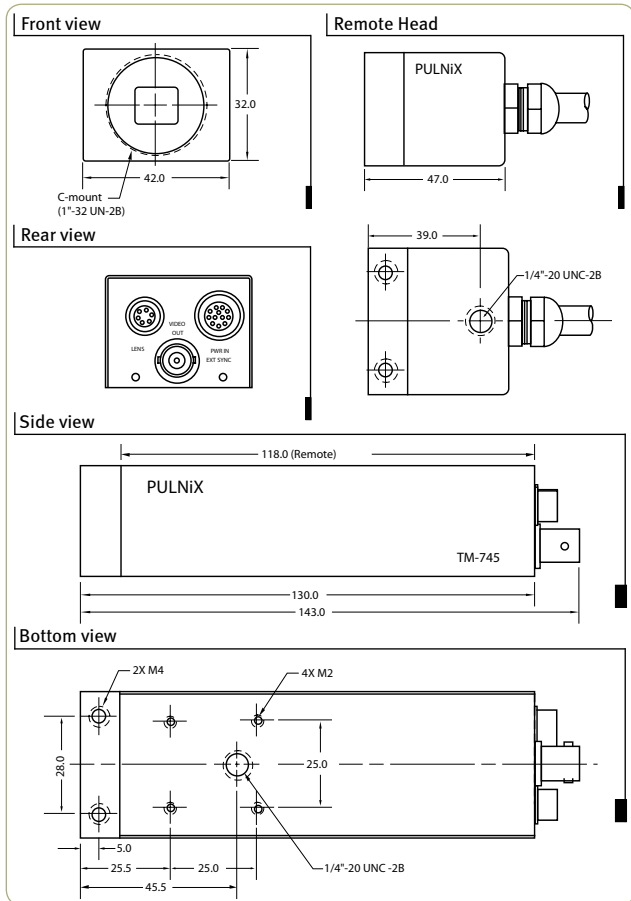

Connector Pin-outs

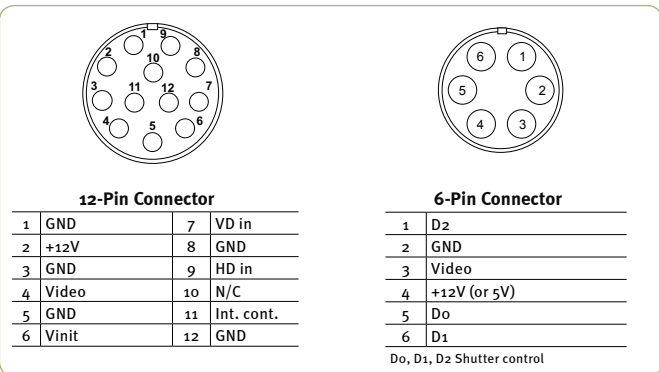

Spectral Response

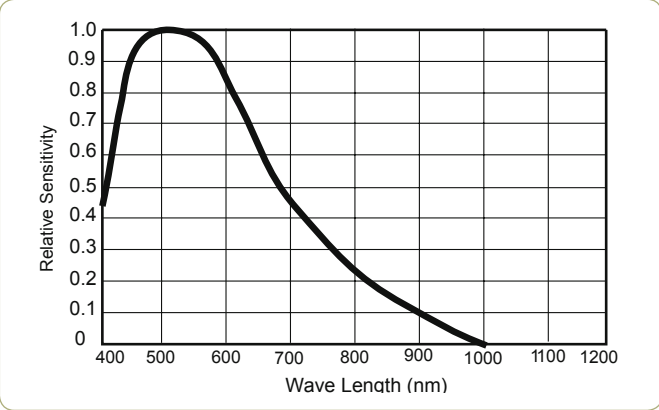

Edge Enhancement

The TM-745E/TM-765E cameras feature built-in edge enhancement to increase the perceived sharpness or visual separation of objects within the video image. This is particularly useful when identifying specific shapes or making precise measurements from the boundaries of objects.

Ordering Information

Camera	
Lead Processing	TM-745E (EIA), TM-765E (CCIR)
RoHS Compliant	RM-745E (EIA), RM-765E (CCIR)
Optional Functions	
AGC Enable	OP1-2
Internal IR Filter Added	OP3-1
Optical Filter Removal	OP3-2
Gamma Adjust to 0.45	OP4-2
Pixel Clock Output	OP7-2
Remote Head w/1-meter cable	OP10-1
Sony Pinout	OP25
Field Mode Set	OP61
DC-Coupled Analog Output	OP72
Optional Accessories (MUST BE ORDERED SEPARATELY)	
Power Cable	12P-02S
Power Supply	PD-12U series
Auto Iris Connector	PC-6P

Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners. JAI-A-S cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notification.



See the possibilities